


Specification Sheet

Part Number: 150-15493

One piece cable tie and fixing offers a simple and easy to use method of bundling and fixing cables.

The design of the fir tree ensures a positive and secure fixing into panels with thicknesses from 0.8mm to 7.0mm or threaded blind holes.

Disc on the top of the fir tree covers the hole and minimizes the ingress of water and dirt.

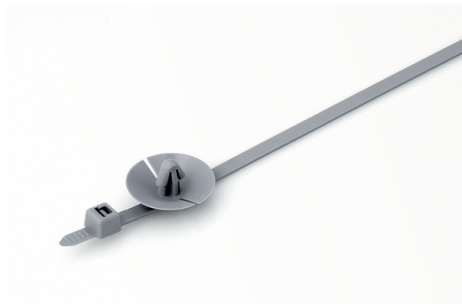

Fir Tree with Tie, 7.5" Long, Mounting Hole Diameter .22"-.25", PA66HS, Black, 500/pkg

Article Number 150-15493

Type T80RSFT

Color Black (BK)

Quantity Per bag

Product Description Fir Tree Mounts offers a simple and easy to use method of bundling and mounting cables. The design of the fir tree ensures a secure and robust fit into panels with a round mounting hole between thicknesses between .03" - .28". The 'disc' on the top of the fir tree covers the hole and minimizes the ingress of water and dirt. The outside serrated tie can be applied by hand and tensioned with one of HellermannTyton's manual or pneumatic hand tools.

Short Description	Fir Tree with Tie, 7.5" Long, Mounting Hole Diameter .22"-.25", PA66HS, Black, 500/pkg
Global Part Name	T80RSFT-PA66HS-BK
Minimum Tensile Strength (Imperial)	80
Minimum Tensile Strength (Metric)	355
Length L (Imperial)	7.5
Length L (Metric)	190
Fixation Method	Arrowhead
Identification Plate Position	none
Releasable Closure	No
Tie Closure	plastic pawl
Variant	Inside Serrated
Width W (Imperial)	0.18
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.26
Bundle Diameter Min (Metric)	7.0
Bundle Diameter Max (Imperial)	1.77

Bundle Diameter Max (Metric)	45.0
Thickness T (Metric)	1.2
Panel Thickness Min (Imperial)	0.04
Panel Thickness Max (Imperial)	0.14
Panel Thickness Min (Metric)	1.0
Panel Thickness Max (Metric)	3.5
Mounting Hole Diameter D (Imperial)	0.22 - 0.25
Mounting Hole Diameter D (Metric)	5.7 - 6.3 mm
Mounting Hole Diameter D Min (Imperial)	0.22
Mounting Hole Diameter D Max (Imperial)	0.25
Mounting Hole Diameter D Max (Metric)	6.3
Disc Diameter (Metric)	24.4
Disc Diameter (Imperial)	0.96
Material	Polyamide 6.6 heat stabilized (PA66HS)
Material Shortcut	PA66HS

Flammability	UL 94 V-2
Use Conditions	For Indoor and Outdoor Use
Operating Temperature	-40°F to +221°F (-40°C to +105°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	500
Package Quantity (Metric)	500
Customs Number	3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2025 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)