

Specification Sheet

Part Number: 151-00646


For use with HellermannTyton T18 - T50 cable ties to provide stability when securing bundles.

4-way opening allows cable ties to be installed parallel or perpendicular to bundles.

The high bond acrylic based adhesive is ideal for outdoor applications, with a static load weight of 1.1 lb.

Two predrilled holes extend mounting options and solutions.

Extended adhesive liner is easy to remove quickly.

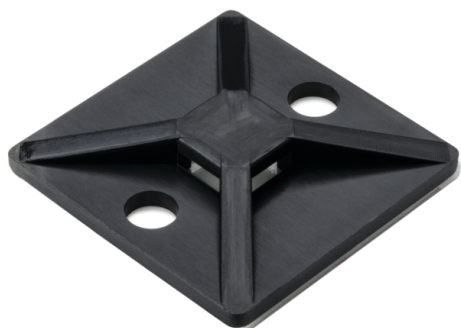

High Bond Acrylic Adhesive Cable Tie Mount, 1.12 x 1.12", Use T18-T50 Cable Tie, PA66UV, Black, 500/pkg

Article Number 151-00646

Type MB4A

Color Black (BK)

Quantity Per pack

Product Description MB4A adhesive mounts are for use with HellermannTyton T18 - T50 Series cable ties to provide stability when securing bundles. The high-bond acrylic adhesive-backed mounts can be used to secure a bundle and have two predrilled holes to extend mounting options.

| | |
|-------------------------------------|---|
| Short Description | High Bond Acrylic Adhesive Cable Tie Mount, 1.12 x 1.12", Use T18-T50 Cable Tie, PA66UV, Black, 500/pkg |
| Global Part Name | MB4A-PA66UV-BK |
| Length L (Imperial) | 1.12 |
| Length L (Metric) | 28.5 |
| Fixation Method | Adhesive |
| Width W (Imperial) | 1.12 |
| Width W (Metric) | 28.5 |
| Cable Ties | T18 - T50 |
| Height H (Imperial) | .23 |
| Height H (Metric) | 5.8 |
| Cable Tie Width Max (Imperial) | 0.18 |
| Cable Tie Width Max (Metric) | 4.6 |
| Mounting Hole Diameter D (Imperial) | 0.18 " |
| Mounting Hole Diameter D (Metric) | 4.6 mm |
| Mounting Hole Centers (Imperial) | 0.8 |

| | |
|--------------------------------|-------------------------------------|
| Material | Polyamide 6.6 UV-resistant (PA66UV) |
| Material Shortcut | PA66UV |
| Adhesive | Acrylate with base of acrylic foam |
| Flammability | UL 94 V-2 (excluding adhesive) |
| UV Resistant (Yes/No) | Yes |
| Use Conditions | For Indoor and Outdoor Use |
| Adhesive Operating Temperature | -31°F to +158°F (-35 °C to +70 °C) |
| Operating Temperature | -40°F to +185°F (-40°C to +85°C) |
| Reach Compliant (Article 33) | Yes |
| ROHS Compliant | Yes |
| Package Quantity (Imperial) | 500 |
| Package Quantity (Metric) | 500 |
| Customs Number | 3926909988 |

7930 N. Faulkner Road, Milwaukee, WI 53224
Phone: (800) 537-1512 | Email: corp@htamericas.com