


Specification Sheet

Part Number: QTTIE9

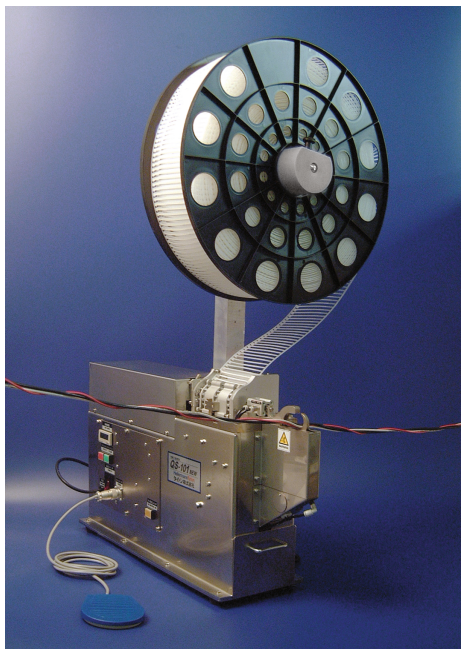

Ties are available in two styles: standard and heat stabilized.

Custom colors for Quick Tool ties are also available. Contact HellermannTyton for more information.

Cable Tie for QS101, 18lb Tensile Strength, PA66, Natural, 5000 Ties/Reel, 2 Reels/Carton

Article Number 105-00006

Type AZ100

Color Natural (NA)

Quantity Per reel

Product Description HellermannTyton's Quick Tool is an automatic bench mount system suited for high volume cable tie applications. This air powered tool accommodates a reel of 5000 ties and, like HellermannTyton's other automated systems, can be integrated into further automation as well as fully incorporated into conveyor or assembly line applications. Custom colors for Quick Tool ties are also available.

| | |
|-------------------------------------|---|
| Short Description | Cable Tie for QS101, 18lb Tensile Strength, PA66, Natural, 5000 Ties/Reel, 2 Reels/Carton |
| Global Part Name | AZ100-PA66-NA |
| Minimum Tensile Strength (Imperial) | 18 |
| Minimum Tensile Strength (Metric) | 80 |
| Length L (Imperial) | 3.94 |
| Length L (Metric) | 100 |
| Identification Plate Position | none |
| Reel Diameter (Imperial) | 18 |
| Reel Diameter (Metric)) | 450.00 |
| Reel Width (Imperial) | 5.2 |
| Reel Width (Metric) | 132 |
| Releasable Closure | No |
| Variant | bandolier |
| Width W (Imperial) | 0.1 |
| Width W (Metric) | 2.5 |
| Bundle Diameter Min (Imperial) | 0.03 |

| | |
|--------------------------------|--------------------------------------|
| Bundle Diameter Min (Metric) | 0.7 |
| Bundle Diameter Max (Imperial) | 0.63 |
| Bundle Diameter Max (Metric) | 16.0 |
| Thickness T (Imperial) | 0.043 |
| Thickness T (Metric) | 1.1 |
| Material | Polyamide 6.6 (PA66) |
| Material Shortcut | PA66 |
| Flammability | UL 94 V-2 |
| UV Resistant (Yes/No) | No |
| Use Conditions | For Indoor Use Only |
| Operating Temperature | -40°F to +185°F (-40°C to +85°C) |
| Reach Compliant (Article 33) | No |
| ROHS Compliant | Yes |
| Certification/Specification | UL ANSI/UL 62275 UL ANSI/UL 1565 |
| UL Recognized (US) | Yes |

| | |
|-----------------------------|------------|
| Package Quantity (Imperial) | 5000 |
| Package Quantity (Metric) | 5000 |
| Customs Number | 3926909988 |
| Reel Weight (Imperial) | 4.8 |
| Reel Weight (Metric) | 2.46 |