


Specification Sheet

Part Number: MMB00C2

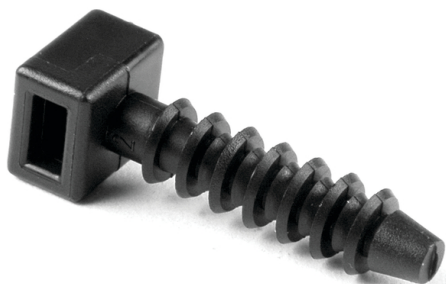

Masonry Mounts provide a permanent solution when fastening wire and cables to masonry surfaces.

The mounts have easy installation into predrilled holes allowing for faster use.

Masonry Cable Tie Mount, 1.2" Long, 0.2" Hole Dia, 0.18" Max Cable Tie Width, PA66STHS, Black, 100/pkg

Article Number 151-29800

Type MMB0

Color Black (BK)

Quantity Per bag

Product Description HellermannTyton Masonry Mounts provide a permanent method of attaching wire and cable to masonry surfaces. Masonry mounts simply tap into predrilled holes and can be used for indoor and outdoor applications.

Short Description Masonry Cable Tie Mount, 1.2" Long, 0.2" Hole Dia, 0.18" Max Cable Tie Width, PA66STHS, Black, 100/pkg

Global Part Name MMB0-PA66STHS-BK

| | |
|---------------------------------------|--|
| Length L (Imperial) | 1.185 |
| Length L (Metric) | 30.1 |
| Fixation Method | Threaded bolt |
| Width W (Imperial) | 0.355 |
| Width W (Metric) | 9.0 |
| Cable Ties | T18 - T50 |
| Height H (Imperial) | .35 |
| Height H (Metric) | 8.90 |
| Cable Tie Width Max (Imperial) | 0.18 |
| Cable Tie Width Max (Metric) | 4.6 |
| Mounting Hole Diameter D (Imperial) | 0.188 |
| Mounting Hole Diameter D (Metric) | 4.7 mm |
| Mounting Hole Diameter D Max (Metric) | 4.7 |
| Material | Polyamide 6.6, super tough, heat stabilized (PA66STHS) |
| Material Shortcut | PA66STHS |

| | |
|------------------------------|-----------------------------------|
| Flammability | UL 94 HB |
| UV Resistant (Yes/No) | No |
| Use Conditions | For Indoor and Outdoor Use |
| Operating Temperature | -40°F to +221°F (-40°C to +105°C) |
| Reach Compliant (Article 33) | No |
| ROHS Compliant | Yes |
| Package Quantity (Imperial) | 100 |
| Package Quantity (Metric) | 100 |
| Customs Number | 3926909988 |

© 2024 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)