

Specification Sheet


Part Number: 156-04051

Edge Clip applies easily to plastic and metal sheets without the need for a mounting hole.

Edge Clip provides low insertion force and high extraction force ideal for assembly environments.

Two piece assembly allows the mount to slide along the strap ensuring proper orientation.

Cable tie is outside serrated to reduce bundle chafing.

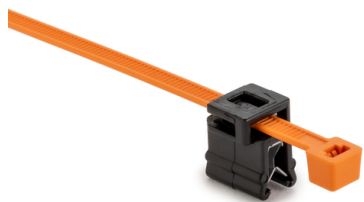

2-Piece Cable Tie & Edge Clip, 8.0"L, EC4B, 1 - 3 mm Panel, 50lb, PA66HIRHS/PA66HIRHSUV, OG/BK,500/pkg

Article Number 156-04051

Type T50REC4B

Color Black (BK) Orange (OG), High Voltage (HV)

Quantity Per bag

Product Description This cable tie and edge clip assembly is ideal for use where holes are not acceptable or where adhesives will fail due to temperature problems. Edge clips are widely used for fixing and bundling cables and wires within automotive, trucking, heavy equipment, solar panel, wind power, and white goods equipment manufacturing.

Short Description	2-Piece Cable Tie & Edge Clip, 8.0"L, EC4B, 1 - 3 mm Panel, 50lb, PA66HIRHS/PA66HIRHSUV, OG/BK,500/pkg
Global Part Name	T50REC4B-PA66HIRHS/PA66HIRHSUV-OG/BK
Minimum Tensile Strength (Imperial)	50
Minimum Tensile Strength (Metric)	225
Length L (Imperial)	8.0
Length L (Metric)	202.0
Fixation Method	Edge Clip
Identification Plate Position	none
Releasable Closure	No
Variant	Inside Serrated
Width W (Imperial)	0.18
Width W (Metric)	4.6
Bundle Diameter Min (Imperial)	0.16
Bundle Diameter Min (Metric)	4.0
Bundle Diameter Max (Imperial)	1.77
Bundle Diameter Max (Metric)	45.0

Thickness T (Imperial)	0.05
Thickness T (Metric)	1.2
Height H (Imperial)	0.63
Height H (Metric)	16.0
Panel Thickness Min (Imperial)	0.04
Panel Thickness Max (Imperial)	0.12
Panel Thickness Min (Metric)	1.0
Panel Thickness Max (Metric)	3.0
Material	Polyamide 6.6 high impact modified, heat and UV stabilized (PA66HIRHSUV) Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
Foot Part Material	PA66HIRHSUV
Material Shortcut	PA66HIRHS PA66HIRHSUV
Material Cable Tie	Polyamide 6.6, high impact modified, heat stabilized (PA66HIRHS)
Flammability	UL 94 HB
Halogen Free	Yes
UV Resistant (Yes/No)	Yes

Use Conditions For Indoor and Outdoor Use

Operating Temperature -40°F to +221°F (-40°C to +105°C)

ROHS Compliant Yes

Package Quantity (Imperial) 500

Package Quantity (Metric) 500

Customs Number 3926909988