

Specification Sheet


Part Number: TSR1FW-33

Tamper resistant, self-locking hidden positive latch permits quick re-entry as well as providing a secure installation of premise wire.

Fittings incorporate a minimum 1" bend radius per ANSI/TIA-568-C and 569-A standards.

Rubber-based, foam-tape adhesive with high ultimate bond strength conforms to any surface.

Flexible hinge allows the raceway to endure numerous openings without creating discoloration or stress cracking

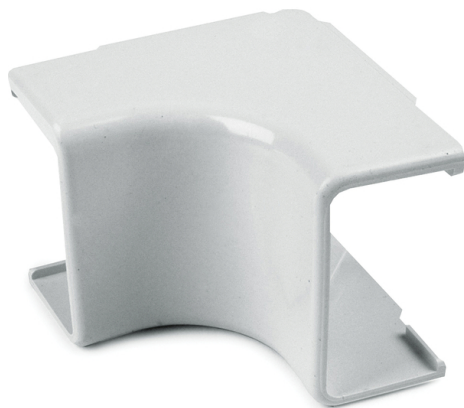

Internal Corner Cover, 3/4", 1" Bend Radius, PVC, Office White, 1/bg

Article Number 250-01331

Type TSR1-33

Color Office White (OEWH)

Quantity Per bag

Product Description HellermannTyton's low voltage raceway (TSR) is a one piece, non-metallic, adhesive backed, latching raceway designed to aesthetically organize and route communications wires, including high speed UTP cable and fiber optic cable, from the telecom room to the work area.

Short Description	Internal Corner Cover, 3/4", 1" Bend Radius, PVC, Office White, 1/bg
Global Part Name	TSR1-33-PVC-WH
Width W (Imperial)	0.75
Material	Polyvinylchloride (PVC)
Material Shortcut	PVC
Flammability	UL 94 V-0
Halogen Free	No
UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Operating Temperature	+122°F (+50°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Package Quantity (Imperial)	1
Package Quantity (Metric)	1

Customs Number

3925900000

© 2024 HellermannTyton. All Rights Reserved.

[Contact Us](#)

[RoHS/WEEE Compliance](#)

[Disclaimer](#)

[Terms and Conditions](#)