


18 AWG – 19×30 Stranded Tinned Copper

Multi-Conductor
Unshielded - 300 Volt
PVC Insulation - 60°C

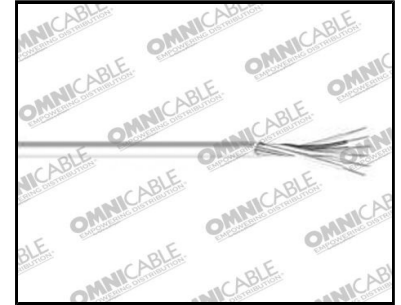

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Tinned copper

Category Insulation Description:

- Polyvinyl Chloride (PVC)

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC) over cabled conductors

Applications:

- Applications include computers, communications, instrumentation, sound, control, audio, and data transmission
- Designed to protect signal integrity under critical conditions by reducing hum, noise, and crosstalk

Standards:

- UL Listed: 60°C
- Voltage: 300 Volt

Color Code Chart	
# of Conductors	Color
1	Black
2	White
3	Red
4	Green
5	Brown
6	Blue
7	Orange
8	Yellow
9	Purple

10	Gray
11	Pink
12	Tan

Part Number Table

Part#	Houston Wire & Cable	Gauge	Conductors	Stranding	Insulation Thickness	Jacket Thickness	Outside Diameter Inches	Material Weight (Lbs./M')
D91802	C2830A	18	2	7x26 TC	0.014	0.032	0.188	17
D91803		18	3	19x30 TC	0.017	0.032	0.235	34.8
D91804		18	4	19x30 TC	0.017	0.032	0.254	39
D91805		18	5	19x30 TC	0.017	0.033	0.29	60
D91806		18	6	19x30 TC	0.017	0.033	0.289	60
D91807		18	7	19x30 TC	0.017	0.037	3.23	81
D91808		18	8	19x30 TC	0.017	0.037	0.339	79.9
D91809		18	9	19x30 TC	0.017	0.037	0.358	87.7
D91810		18	10	19x30 TC	0.017	0.04	0.362	97.9
D91812		18	12	19x30 TC	0.017	0.04	0.424	131.4
D91815		18	15	19x30 TC	0.017	0.045	0.48	175
D91819		18	19	19x30 TC	0.017	0.045	0.49	172
D91820		18	20	19x30 TC	0.017	0.045	0.511	199.1
D91825		18	25	19x30 TC	0.017	0.06	0.55	211.6

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances. *Ring Band Striping

Selling Exclusively Through Distribution Since 1977™ | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC