


20 AWG – 7×28 Stranded Tinned Copper – Polyethylene

Twisted Pairs - 30 Volt
 Individually Shielded
 Polyethylene Insulation

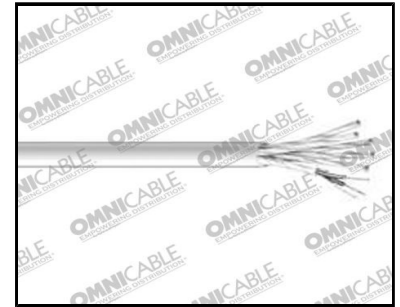

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- Stranded tinned copper

Category Insulation Description:

- Polyethylene (PE)

Shield Drain:

- Each pair individually shielded with aluminum-polyester shield and 22 AWG stranded tinned copper drain wire

Category Jacket Description:

- Gray, Polyvinyl Chloride (PVC)

Applications:

- Allow balanced signal transmission which results in lower crosstalk through common mode rejection
- Recommended for audio, pulse, and radio frequency applications requiring superior circuit isolation
- Permits higher data speeds than multi-conductor cables

Standards:

- UL Listed: 80°C
- Voltage: 30 Volt

Color Code Chart			
Cond #	Color	Cond #	Color
1	Black & Red	31	Purple & White
2	Black & White	32	Purple & Green
3	Black & Green	33	Purple & Blue
4	Black & Blue	34	Purple & Yellow
5	Black & Yellow	35	Purple & Brown
6	Black & Brown	36	Purple & Black
7	Black & Orange	37	Gray & White
8	Red & White		
9	Red & Green		

10	Red & Blue		
11	Red & Yellow		
12	Red & Brown		
13	Red & Orange		
14	Green & White		
15	Green & Blue		
16	Green & Yellow		
17	Green & Brown		
18	Green & Orange		
19	White & Blue		
20	White & Yellow		
21	White & Brown		
22	White & Orange		
23	Blue & Yellow		
24	Blue & Brown		
25	Blue & Orange		
26	Brown & Yellow		
27	Brown & Orange		
28	Orange & Yellow		
29	Purple & Orange		
30	Purple & Red		

Part Number Table

Part#	Houston Wire & Cable	Gauge	Pairs	Stranding	Outside Diameter Inches	Nominal Capacitance A	Nominal Capacitance B	Material Weight (Lbs./M')
D32003	HW9873	20	3	7x28 TC	0.341	30	55	67
D32006		20	6	7x28 TC	0.445	30	55	125
D32009		20	9	7x28 TC	0.555	30	55	187
D32011		20	11	7x28 TC	0.617	30	55	205
D32012		20	12	7x28 TC	0.617	30	55	219
D32015		20	15	7x28 TC	0.689	30	55	265

* Capacitance between conductors ** Capacitance between one conductor and other conductors connected to shield Note: The data shown is approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977™ | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC