


Aluminum Mobile Home Feeder; 600V

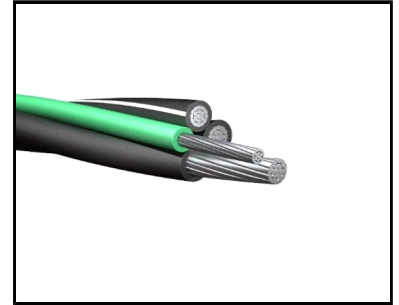

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- 8000 series aluminum

Applications:

- Used to provide power from the electrical disconnect to the panel board in mobile home applications in dry, wet and underground condition.

Category Insulation Description:

- XLPE - Cross-Linked Polyethylene

Standards:

- UL 44
- RHW-2
- UL 854 uSE-2
- ASTM B 800
- ASTM B 801

Part Number Table

Part#	Houston Wire & Cable	Phase Conductor AWG	Phase Conductor Stranding	Phase Conductor Insul. Thick. Mils	Ground AWG	Material Weight (Lbs./M')
MHF2-2-4-6		2	7	60	6	296
MHF4/02C-2/0-4	HW23A.pdf	4/0	19	80	4	848

Note: The data shown is approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •

St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC