


#8/3, #10G, 18/9C TCERJP Generator Installation Tray Cable, 600V Copper Conductors, PVC Insulation and Jacket

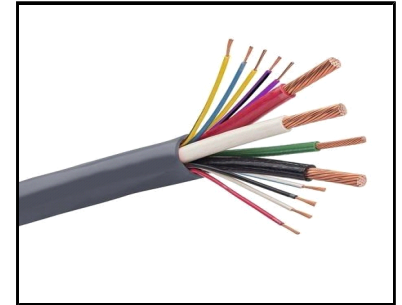

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- 8 AWG class C stranded, 10 AWG Class C stranded, soft drawn, bare copper circuit conductors w/40 mils (1.02 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 6 mils (0.15 mm) nylon applied directly to the surface of the insulation. 18 AWG Class K stranded, soft drawn, bare copper conductors w/15 mils (0.38 mm) heat and moisture resistant, polyvinyl chloride (PVC) insulation and jacketed w/ 4 mils (0.10 mm) nylon applied directly to the surface of the insulation. C: Mylar binder tape.

Category Jacket Description:

- Moisture resistant, polyvinyl chloride (PVC) insulation

Voltage Search:

- 600V

Applications:

- Suited for use in cable trays, aerial or direct burial installations.
- Type TC-ER Power Control Generator Tray Cable
- JP rated for installation in accordance with Part II of Article 337

Category Insulation Description:

- Polyvinyl Chloride (PVC) insulation

Size Generator:

- 7-11 KW Rated Generator

Conductor Material:

- Bare Copper

Standards:

- ASTM B3
- ASTM B8
- ASTM B14
- ICEA S-95-658 (NEMA WC 70)
- ICEA S-73-532 (NEMA WC 57)
- UL 83 Type THWN
- UL 1277
- UL THWN 600V
- UL Type TC-ER-JP 600V

Part Number Table

| Part# | Outside Diameter Inches | Ground Gauge | Temperature |
|---------------|-------------------------|--------------|-------------|
| TCERJP0711CU9 | 0.715 | 8 | 90°C |

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC