


Specification Sheet

Part Number: 170-03065

A layer of aluminum provides protection from chemicals, scraping, cuts and abrasion.

Additional layer also provides insulation barrier for vulnerable wires and cables within high temperature environments.

Cuts with ordinary scissors for fast, easy application.

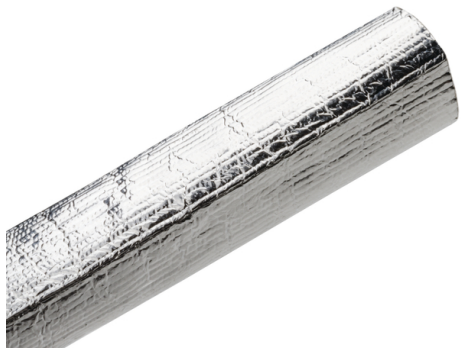

Braided Sleeving, Aluminum Laminated Fiberglass, 1.75" Dia, AL/GF, Silver, 50 ft/reel

Article Number 170-03065

Type BSHTTST134SR

Color Silver (SR)

Quantity Per pack

Product Description High Temperature Aluminum Laminated Fiberglass Sleeving is a tubular shaped product that combines the protection of bonded aluminum and fiberglass into a single solution that is able to reflect radiant heat away from the sensitive contents inside the tube.

Short Description Braided Sleeving, Aluminum Laminated Fiberglass, 1.75" Dia, AL/GF, Silver, 50 ft/reel

Global Part Name BSHTTST134SR-AL/GF-SR

Length L (Imperial)	50.0
Length L (Metric)	15.2
Bundle Diameter Min (Imperial)	0.1
Bundle Diameter Min (Metric)	2.54
Bundle Diameter Max (Imperial)	1.69
Bundle Diameter Max (Metric)	42.8
Diameter D (Imperial)	1.25
Diameter D (Metric)	31.8
Nominal Diameter (Imperial)	1.75
Nominal Diameter (Metric)	44.5
Wall Thickness WT (Imperial)	0.025
Wall Thickness WT (Metric)	0.64
Material	Aluminum (AL) Glass Fiber (GF)
Material Shortcut	AL GF
Halogen Free	Yes

UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Operating Temperature	-76°F to +491°F (-60°C to +255°C)
Reach Compliant (Article 33)	Yes
ROHS Compliant	Yes
Package Quantity (Imperial)	50
Package Quantity (Metric)	15.24
Customs Number	7019905150

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2025 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)