


Specification Sheet

Part Number: TAG75T1-795

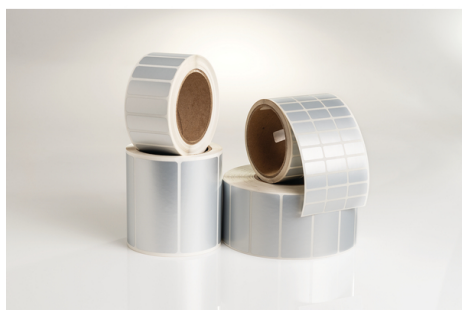

Metalized polyester has a matte finish, allowing for the highest resolution and print contrast.

The acrylic-based adhesive bonds to a wide variety of substrates and can withstand high temperatures long term.

Thermal Transfer Adhesive Labels, 2.0 x 0.63", 1 Across, Polyester, Silver, 2000/roll

Article Number 596-75795

Type TAG75T1

Color Silver (SR)

Quantity Per reel

Product Description HellermannTyton's metalized polyester labels include a layer of metallic particles that give the appearance of being made of metal. Applications include asset tracking and product rating plates. The high operating temperature makes them suitable for use on electronic equipment. Great for replacing expensive metal stampings, engravings and even silk screened rating plates, the printed labels offer high quality imaging for text and graphics and can be permanently placed on a wide variety of flat surfaces.

Short Description Thermal Transfer Adhesive Labels, 2.0 x 0.63", 1 Across, Polyester, Silver, 2000/roll

Global Part Name	TAG75T1-795-SR
Width W (Imperial)	2.0
Width W (Metric)	50.8
Thickness T (Metric)	64.0
Height H (Imperial)	0.625
Height H (Metric)	15.87
Width of Liner (Metric)	53.8
Width of Liner (Imperial)	2.12
Material	Type 795, Polyester (795)
Material Shortcut	795
Adhesive	Acrylic
Halogen Free	Yes
UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Adhesive Operating Temperature	-40°F to +194°F (-40°C to +90°C)

Operating Temperature -40°F to +300°F (-40°C to +149°C)

Reach Compliant (Article 33) Yes

ROHS Compliant Yes

Certification/Specification UL-Recognized

UL Recognized (US) Yes

UL Recognized (US and Canada) Yes

Package Quantity (Imperial) 2000

Package Quantity (Metric) 2000

Customs Number 3919102055

Labels per Column 1

Labels per Row 1