


15kV - EPR Insulation, PVC Jacket

Single Conductor - EPR Insulation - PVC Jacket
15 kV, EPR/Copper Tape Shield
UL Type MV-105
133% Insulation Levels

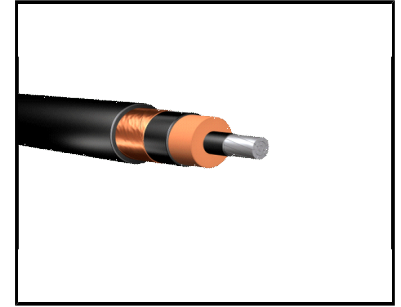

*Product images are for illustrative purposes only and may differ from the actual product.

Category Conductor Description:

- 2 AWG thru 1000 kcmil 1350 aluminum compact Class B strand

Category Insulation Description:

- Lead-free Ethylene Propylene Rubber (EPR) insulation, contrasting in color to the black semi-conducting shield layers

Metallic Shield:

- 5 mil annealed copper tape with an overlap of 25%

Applications:

- Superior performance in petrochemical plants, pulp and paper mills, sewage and water treatment plants, environmental protection systems, railroads, mines, utility power generating stations, steel mills, textile plants and other industrial three-phase applications
- For use in wet or dry locations when installed in accordance with NEC
- For use in aerial, conduit, open tray and underground duct installations
- For use in direct burial if installed in a system with a ground conductor that is in close proximity, and conforms with NEC 250.4(A)(5)

Extruded Strand Shield:

- Extruded thermoset semi-conducting stress-control layer over conductor

Extruded Insulation Shield:

- Thermoset semi-conducting polymeric layer free stripping from insulation

Category Jacket Description:

- Low-friction, lead-free, flame-retardant, moisture and sunlight-resistant Polyvinyl Chloride (PVC)

Standards:

- National Electrical Code (NEC)
- UL 1072
- ICEA S-93-639/NEMA WC74
- ICEA S-97-682
- AEIC CS8
- UL listed as Type MV-105 for use in accordance with NEC, UL File # E90501
- IEEE 1202 (70,000 BTU/hr)/CSA FT4
- EPA 40 CFR, Part 261 for leachable lead content per TCLP method
- OSHA Acceptable
- RoHS Compliant

Part Number Table

Part#	Houston Wire & Cable	Gauge	Conductor Diameter	Insulation Diameter Min	Insulation Diameter Max	Jacket Thickness	Outside Diameter Inches	Material Weight (Lbs./M')
MVA30201	HW208A.pdf	2	.270"	.710"	.800"	0.08	0.99	488
MVA30101		1	.310"	.745"	.830"	0.08	1.02	523
MVA31/001	HW208A.pdf	1/0	.340"	.780"	.865"	0.08	1.06	575
MVA32/001	HW208A.pdf	2/0	.380"	.820"	.905"	0.08	1.089	627
MVA33/001		3/0	.430"	.865"	.955"	0.08	1.134	690
MVA34/001	HW208A.pdf	4/0	.480"	.920"	1.005"	0.08	1.184	758
MVA325001		250	.530"	.970"	1.06"	0.08	1.242	837
MVA335001	HW208A.pdf	350	.620"	1.07"	1.155"	0.08	1.337	994
MVA350001	HW208A.pdf	500	.740"	1.19"	1.275"	0.08	1.457	1217
MVA375001	HW208A.pdf	750	.910"	1.37"	1.46"	0.08	1.639	1583
MVA3100001		1000	1.06"	1.52"	1.61"	0.11	1.852	2026

Note: The data shown are approximate and subject to standard industry and manufacturer tolerances

Selling Exclusively Through Distribution Since 1977™ | phone: 800-292-OMNI | website: omnicable.com
Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto
© 2020 Omni Cable LLC