


Bare Armored Grounding Wire - Interlocked Galvanized Steel Armor

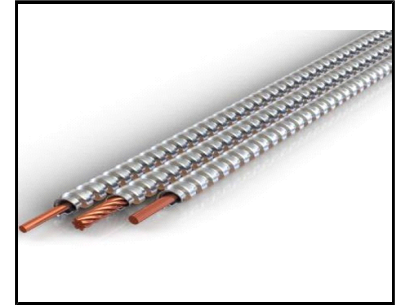

*Product images are for illustrative purposes only and may differ from the actual product.

Category Standards:

- UL 467, File Number: E82631

Armor:

- Interlocked Galvanized Steel Strip

Voltage Rating:

- 600V

Category Description:

- Bare armored ground cables, also referred to as BAG Wire, it is used as a grounding electrode conductor. These conductors connect the system grounded conductor, or the equipment, to a grounding electrode or a point on the grounding electrode system. For example, the grounding conductor can connect equipment such as electrical service panels to grounding electrodes such as metal underground water pipes, metal building frames, or other electrodes permitted for grounding.

Conductor Material:

- Solid 8 AWG & 6 AWG Copper Stranded 4 AWG Copper

Standards:

- UL 467, File Number: E82631

Part Number Table

Part#	Gauge	Stranding	Outside Diameter Inches
BAG4SR	4	#4 Stranded	0.53
BAG6SL	6	#6 Solid	0.67
BAG8SL	8	#8 Solid	0.67

Selling Exclusively Through Distribution Since 1977 TM | phone: 800-292-OMNI | website: omnicable.com

Atlanta • Boston • Charlotte • Chicago • Cincinnati • Denver • Houston • Los Angeles • Philadelphia • San Francisco • Seattle •
St. Louis • Tampa • Toronto

© 2020 Omni Cable LLC